

FICHA TÉCNICA

12/05/2021

REF. AR100-MH

VÁLVULA DE ESFERA PN25 M-H PASO ESTÁNDAR

MANDO PALANCA ERGONÓMICO

BALL VALVE PN25 M-H STANDARD BORE


ERGONOMIC MANUAL CONTROL LEVER

ARFOSA®

MEDIDAS / DIMENSIONS



Ref.	D	L	M	P	H	Peso
AR100-12MH	1/2" MH	50	98	13	47	140g
AR100-34MH	3/4" MH	58,5	98	18	50	220g
AR100-1MH	1" MH	68	116	22	57	346g
AR100-114MH	1¼" MH	78	115	27	60,5	468g
AR100-112MH	1½" MH	85,5	157	34	70	765g
AR100-2MH	2" MH	98,5	155,5	42,5	76	1071g

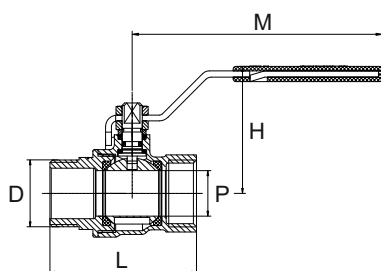

CARACTERÍSTICAS TÉCNICAS / MAIN CONSTRUCTIVE FEATURES

- PN25
- Paso estándar
- Palanca ergonómica color azul
- Cuerpo de latón CW617N cromado
UNE-EN 228/1
- Asientos de PTFE
- Rosca de entrada gas (BSP)
según ISO 228/1
- Temperatura máxima 110°C
- PN25
- Standard bore
- Steel manual control lever color blue
- Body chromed brass CW617N
UNE-EN 228/1
- PTFE seats
- Inlet thread gas (BSP) according
to ISO 228/1
- Max. temp. 110°C

DESPIECE / COMPONENTS

Nº	Cant.	Descripción producto	Materia prima
1	1	Cuerpo / Body	Latón / Brass CW617N
2	1	Tapa / Cap	Latón / Brass CW617N
3	2	Asiento / Seat	PTFE
4	1	Esfera / Ball	Latón / Brass
5	1	Eje / Stem	Latón / Brass
6	2	Anillo prensa / Stem packing	PTFE
7	1	Juntas tóricas / O-Ring	NBR
8	1	Anillo prensa / Stem packing	Latón / Brass
9	1	Mando / Handle	Acero / Steel
10	2	Tuerca / Nut	Acero INOX / Stainless Steel

